

Figure 1

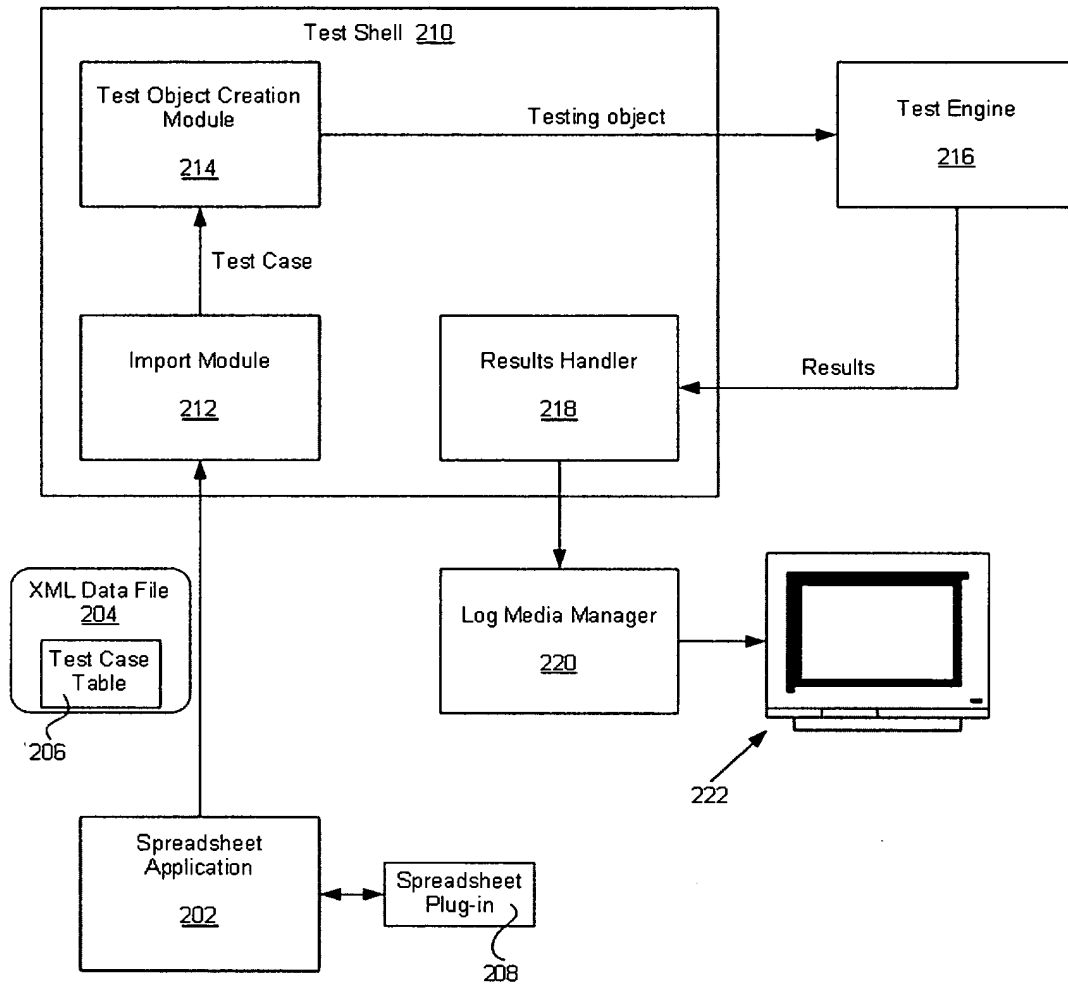


Figure 2

204

```
<ctablelist name = "Sample Tables">
  <ctable name = "Sample">
    <paramname> InitOnce </paramname>
    <paramname> HostSink </paramname>
    <paramname> RetCode </paramname>
    <test caseid = "1" inTCM = "0">
      <param> BOOL_FALSE </param>
      <param> VALID_CODE_PTR </param>
      <param> S_OK </param>
    </test>
    <test caseid = "2" inTCM = "0">
      <param> BOOL_FALSE </param>
      <param> NULL_PTR </param>
      <param> E_POINTER </param>
    </test>
  </ctable>
</ctablelist>
```

310

Parameters  
304

312

308

First Test Case  
306

Second Test Case  
314

```

<?xml version="1.0" encoding="utf-8" ?>
<xs:schema targetNamespace="http://tempuri.org/XMLSchema.xsd"
  elementFormDefault="qualified"
  xmlns="http://tempuri.org/XMLSchema.xsd"
  xmlns:msns="http://tempuri.org/XMLSchema.xsd"
  xmlns:xs="http://www.w3.org/2001/XMLSchema">

  <xs:element name="CtableList">
    <xs:complexType>
      <xs:sequence>
        <xs:element name="Ctable" minOccurs="1" maxOccurs="1" />
        <xs:sequence>
          <xs:element name="paramname" type="xs:string" minOccurs="1" maxOccurs="1" />
          <xs:element name="test" minOccurs="1" maxOccurs="1" />
          <xs:complexType>
            <xs:sequence>
              <xs:element name="param" type="xs:string" minOccurs="1" maxOccurs="1" />
            </xs:sequence>
          </xs:complexType>
          <xs:attribute name="caseid" type="xs:string" />
          <xs:attribute name="intCW" type="xs:positiveInteger" />
        </xs:sequence>
      </xs:sequence>
    </xs:complexType>
  </xs:element>

  <!-- This attribute goes with Ctable -->
  <xs:attribute name="name" type="xs:string" />
</xs:sequence>
</xs:complexType>
</xs:element>
</xs:schema>

```

Figure 4